



# Z1S -V05-W


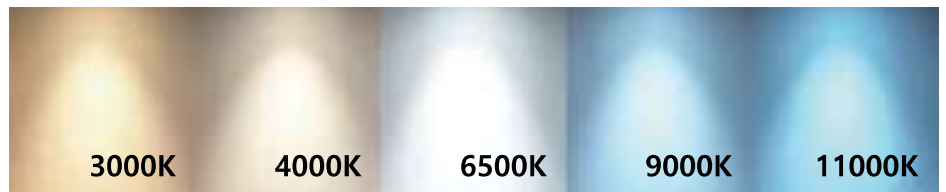


## FEATURES

- The genuine SAMSUNG 9V LED in each module
- Two-sided adhesive tape for peeling
- High efficiency led lighting products with less consumption of energy, more brightness
- Long life-span over 50,000 hours under Interone own high-technologies
- Reliable and qualified products meet global standards such as UL,CE,CB, and more

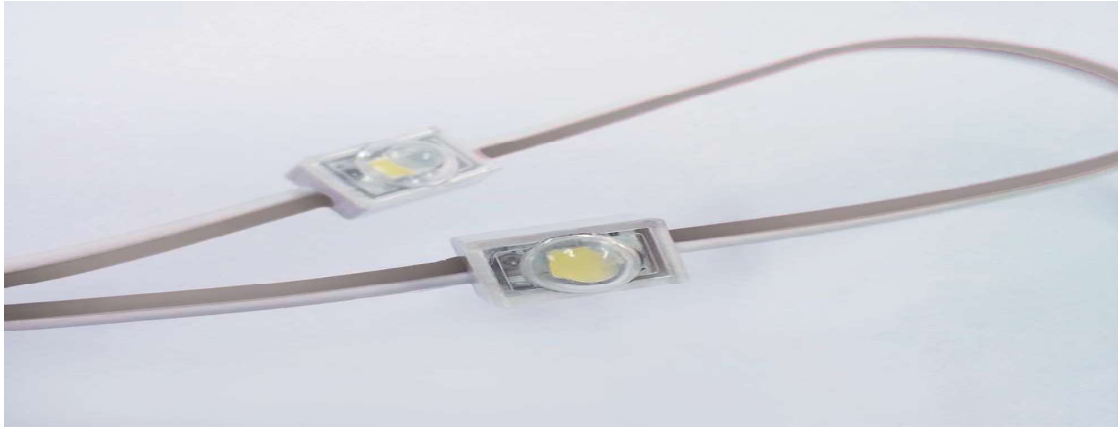

## DIMENSION







## TECHNICAL SPECIFICATION

OPERATION VOLTAGE	DC 12V
POWER CONSUMPTION	0.24W
CURRENT	20mA
VIEWING ANGLE	160
COLOUR RENDERING INDEX	80
BEAM ANGLE	160
WEIGHT	1g
LIFESPAN	~50000h
OPERATION TEMPERATURE	-30~70C
IP RATING	IP68
COMPLIANCE WITH	CE / RoHS / UL / KS / SASO / BIS
WARRANTY	5 Years

## CCT/LUMEN

CCT	LIGHT COLOR	LM	LM/W
3000K	WARM WHITE	19	79
4000K	NATURAL WHITE	20	83
6500K	PURE WHITE	20	83
9000K	COOL WHITE	25	104
11000K	COLD WHITE	26	105

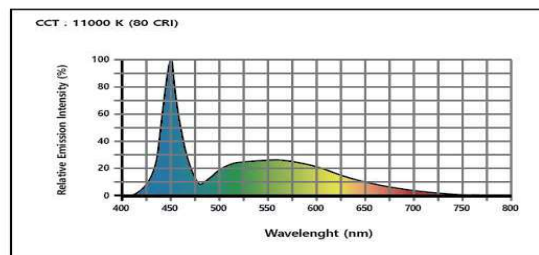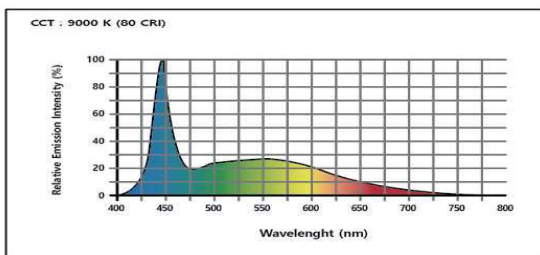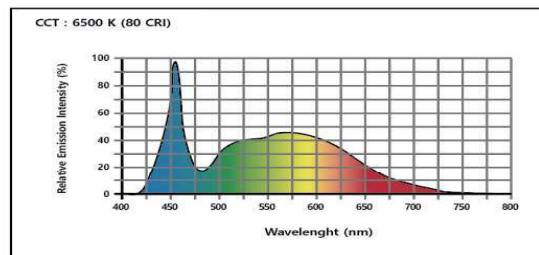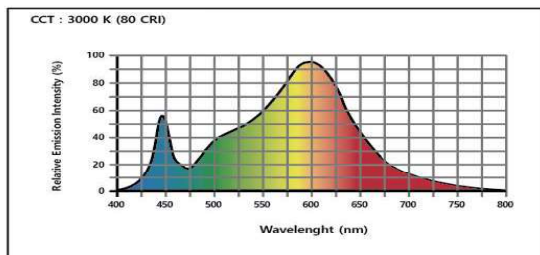

# Z1S-V05-W



## PRODUCT

**Part 1 High Luminous Efficiency**  
High light effective: No light decay after working 1000Hrs'  
With 50,000Hrs lifespan  
Adopt Genuine LED package from SAMSUNG and SEOUL-SEMICONDUCTOR



**Part 3 Lens**  
Patented unique Peanut Shape of beam angle, various options to choose upon the request



**Part 4 - Molding**  
Zero solder - Patented Wire-Thru® and Reverse-Circuit Protection make high durability & outstanding quality




**Part 2 High Quality PCB board**  
Mounting process made from surface mount technology expertised experts with ideal pitching size



**Part 5 Adhesive tape on the back**  
(Satisfying the standard of ASTM, Same model as the one supply to Hyundai-Motors)



**Part 6 High-quality Wire**  
True AWG 18 Copper Wire (99.99%)








## PACKAGING DIMENSION

**ZIPPER BAG : 1,000 PCS**  
**CARTON BOX : 10,000 PCS (20 KG)**



# Z1S -V05-W

## INSTALLATION GUIDE

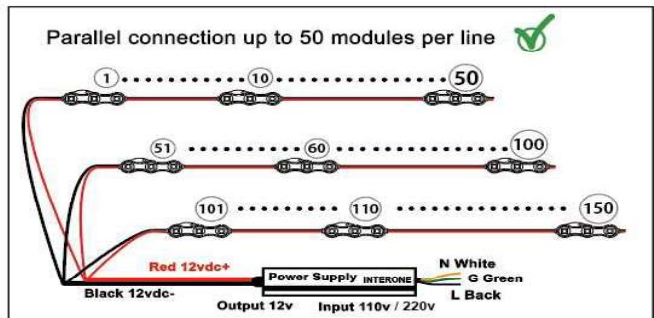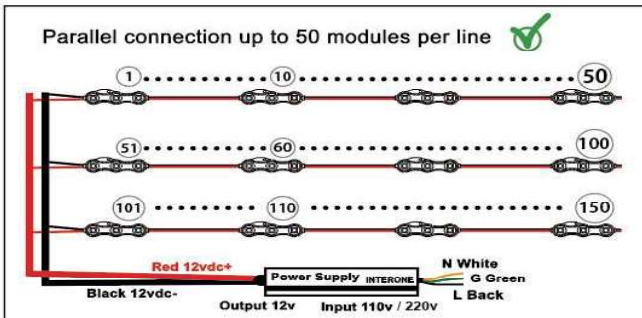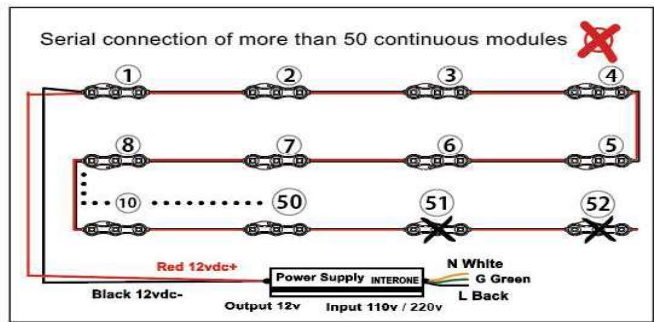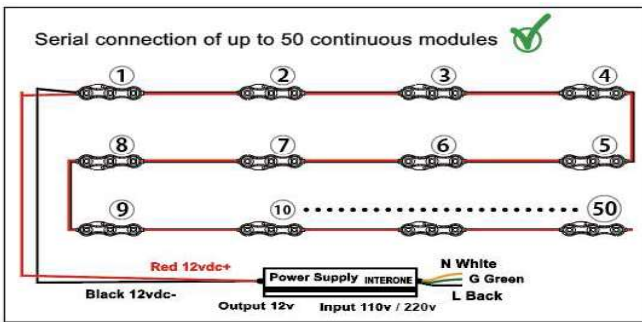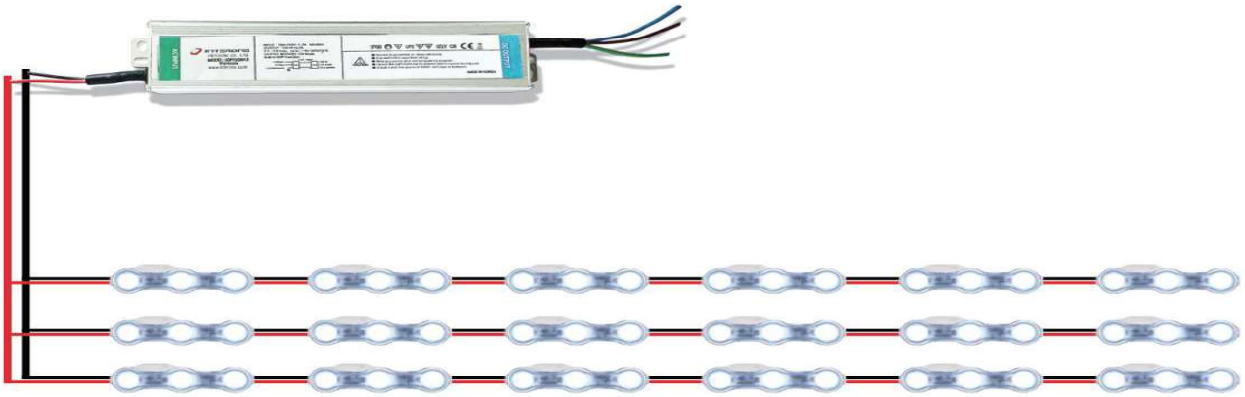

Module	Power Supply 100W	Power Supply 150W	Power Supply 200W	Power Supply 300W
0.24 W	300 ea	440 ea	580 ea	895 ea

## INSTALLATION GUIDELINE

